


63537





Four-holes bath mixer with diverter, tub-filler spout and 1,50 m flexible hose and antilimestone handshower

TECHNICAL FEATURES

· Drive: Single lever

· Presence of water supply connections: yes

• Connection hoses: Flexible supply hoses included

Power supply connections: G1/2"

Height: 196 mmWidth: 350 mmDepth: 229 mm

Water point presence: Yes

Water mixing type: Mechanical mixing

Cartridge type: Mixer cartridge

• Cartridge size: 35 mm

Number of water outlets: 2 exits

Diverter type: Rotary diverter

Handshower presence: Handshower included

Handshower type: Single-jetHandshower size: 50 mm

• Handshower jet type: RAINFALL


Handshower support type: FixedHandshower hose presence: yes

• Handshower hose length: 1.500 mm

Hose material: Metal

Water point height: 130 mmWater point length: 190 mm

Flow rate: 18 l/min

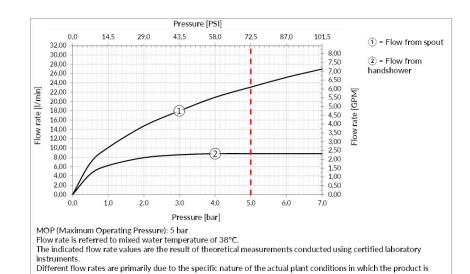

CERTIFICATIONS

installed



- BELGAQUA recognized
- Water tightness resistance and long term functionality in accordance with EN-817
- The main components in contact with drinking water comply with ACS requirements, UBA list, KTW BWGL

Production managed by a certified quality System compliant with ISO 9001:2015 For additionals approval contact Gessi S.P.A.

TECHNICAL PRESCRIPTION

- Working maximum pressure value 72.5 PSI in case of higher pressure, to use a pressure reducer.
- Working pressure for an optimal installation: 43.5 PSI.
- Supply the product with mains water with a maximum temperature of 70 °C and for short periods of use.
- In order to guarantee a long duration of the product and its total functionality install filter.
- Test watertight and cleaning of the pipes before installing the tap.

In any case please refer to the instruction manual and warranty provided with the product.

INDICATIONS FOR CLEANING

Clean only with a new microfiber cloth and soapy water and properly dry the item. Detergents, solvents, chemical agents, abrasive sponges, wire, wool, alcohol, etc. should not be used as these could irreparably damage product surfaces compromising its aesthetics and brightness.

ACCESSORIES AND FITTINGS

For additional matching bathroom accessories and fittings available, see official Gessi price list.

FINISHES CHARACTERISTICS

CHROME The galvanic process is the basis of almost all Gessi finishes. The first production step consist in covering component with

several layers of coating by electrochemical reactions. It makes durable finishes, virtually impervious to wear or scratches.

Chrome has high resistance to corrosion and is easy to clean.

STAINLESS STEEL Not many materials can praise a resistant similar to the stainless steel, that never, in every environmental condition, loose

the proper shining, perfect elegance, the rich color, asking also a really minimum maintenance. Recyclable 100%, steel

can be regenerated and reused forever, permitting to reduce the consumption of natural resource.

PVD COLORS PVD are innovative finishes that allow best performances and technical qualities, characterized by unique mechanical

resistance and exceptional brightness, that are made by letting vapours of metallic alloys deposit on chromed component. This process makes it possible to achieve excellent resistance to corrosion and abrasion. In addition, the

technology allow for a great variety of colors according to the metal that are used.

LAQUERED Laquered finishes, with their peculiar aesthetic performance, are made by covering the product with various layers of

different kind of lacquer. For example, in order to obtain the aged look the process start with sandblasted component, that is firstly lacquered in gold and then in black or brown, then highly specialized artisans manually brush the surface,

bringing back to light the golden tones.

For additionals finishes contact Gessi S.P.A