


DuraStyle Toilet wall-mounted for shower toilet seat #
254259..00 / 254259..00

| < 376 mm > |

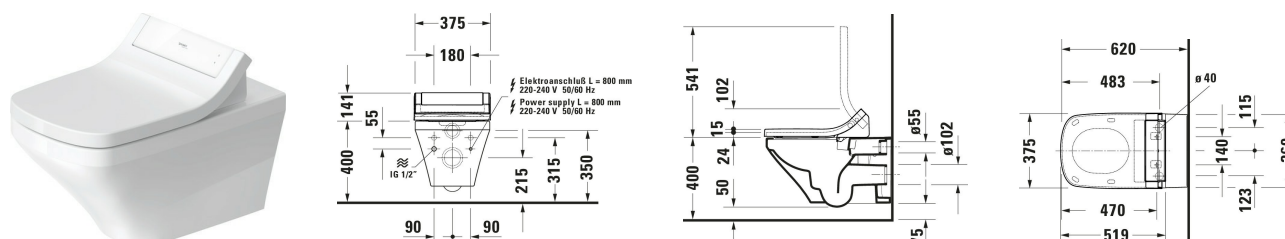

| Toilet wall-mounted for shower toilet seat | Dimension | Weight | Order number |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------|--------------|
| <p>Flush water quantity: 4,5/3 l, Washdown model, Flushing rim: Rimless, Outlet drain horizontal, Incl. invisible fixation, Incl. connecting set for SensoWash, Unified Water Label (UWL) Class: 1</p> | | | |
| Colors | | | |
| 00 White Alpin 20 HygieneGlaze (an antibacterial ceramic glaze that provides almost indefinite effectiveness) | | | |
| Variant | | | |
| <p>♣ White High Gloss, Flush water quantity: 4,5 l</p> | | 28.300 kg | 254259..00 |
| <p>♣ White High Gloss, HygieneGlaze, Flush water quantity: 4,5 l</p> | | 28.300 kg | 254259..00 |
| <p>Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.</p> | | | |
| Accessory | | | |
| Pre-installation set | 135 x 105 mm | 0.43 kg | 005072 |
| Noise reduction set | 420 x 390 mm | 0.2 kg | 005090 |
| Vario Connector Set | 260 x 220 mm | 0.385 kg | 100730 |
| Vario Connector Set | 220 x 260 mm | 0.45 kg | 100692 |
| Vario Connector Set | 220 x 260 mm | 0.7 kg | 100691 |
| Suitable products | | | |
| <p>Shower toilet seat Suitable for series DuraStyle, White, Automatic close, Seat material type: Duroplast, Lid material type: Duroplast, Adjustable shower jet position level: 5 Steps, Controllable spray jet intensity steps: 3 Steps, Controllable spray jet temperature steps: 4 Steps, Adjustable shower jet position level: 5 Steps, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Remote control, Controller, Self-cleaning shower nozzle/shower head, Decalcification function, Holiday mode, Night light, Protection type: IPX4, 375 x 540 mm</p> | 375 x 540 mm | | 611200 |

DuraStyle Toilet wall-mounted for shower toilet seat #
254259..00 / 254259..00

|< 376 mm >|

| | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------|
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1011 |
| <p>Installation element dry installation for WC Odour extraction, Fan activation: Manual, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1012 |
| <p>Installation element dry installation for WC Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1013 |
| <p>Installation element dry installation for WC Odour extraction, Fan activation: Automatic, Manual, At the touch of a button, Touchless, Hygienic flush, 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Electronic, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1014 |
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1016 |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | 500 x 155 mm | WD1017 |

DuraStyle Toilet wall-mounted for shower toilet seat #
254259..00 / 254259..00

|< 376 mm >|

| | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------|
| <p>Installation element dry installation for WC Standard 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | <p>500 x 155 mm</p> | <p>WD1018</p> |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: FrontTop, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | <p>500 x 155 mm</p> | <p>WD1019</p> |
| <p>Installation element dry installation for WC Basic 6 l, Powder-coated, Type of installation: In standard lightweight construction, In front of solid wall, Type of mounting: Drywall, Max. projection toilet: 625 mm, Height with feet: 240 mm, Flush operation: Mechanical, Flush operation position: Front, Adjustable flush volumes, Flush type: Dual Flush, insulated against condensation, Throttle for regulating the flush flow, Self-supporting, Suitable for panelling with plasterboards, 500 x 155 mm</p> | <p>500 x 155 mm</p> | <p>WD1020</p> |
| <p>Shower toilet seat Suitable for series DuraStyle, Automatic close, Adjustable shower jet position level: 5 Steps, Controllable spray jet intensity steps: 3 Steps, Controllable spray jet temperature steps: 4 Steps, Adjustable shower jet position level: 5 Steps, Rearwash, Ladywash, Pulsing shower spray: Oscillating, Warm air dryer, Number of programmable user profiles: 4, Self-cleaning shower nozzle/shower head, Decalcification function, Energy saving mode: Adjustable, Holiday mode, Night light, 375 x 520 mm</p> | <p>375 x 520 mm</p> | <p>613200</p> |

All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding. Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.