

**BOSSINI**
HIGH QUALITY SHOWER SYSTEMS

design Marcello Ziliani

SCHEDA TECNICA - TECHNICAL SHEET

17/03/2025

Rev: 0

Codice - Code:**E89607**APICE-T (Tall) single lever mixer
with horizontal knob for wash basins**Descrizione - Description:**Miscelatore monocomando lavabo APICE-T (Tall) con aeratore rettangolare 28x7mm.
Scarico 1"1/4" click-clack e flessibili inox 3/8" F

APICE-T (Tall) single lever basin mixer with 28x7mm rectangular aerator. 1"1/4 click-clack waste and 3/8" F stainless steel flexible hoses


Tecnologia - Technology:

APICE-T (Tall) Einhebel Waschtischmischer mit rechteckigem Strahlregler 28x7mm. Ablaufventil 1"1/4 und 3/8" iG Schläuche aus Edelstahl


Mitigeur monocommande lavabo APICE-T (Tall) avec aérateur rectangulaire 28x7mm. Vidage 1"1/4 et flexibles en acier inoxydable 3/8" F

Mezclador monomando lavabo APICE-T (Tall) con aireador rectangular 28x7mm. Desagüe 1"1/4 y flexibles en acero inox 3/8" F

Смеситель монорычажный для раковины APICE-T (Tall) с прямоугольным аэратором 28x7mm. Донный клапан 1"1/4 и гибкая подводка из нерж. стали 3/8" F

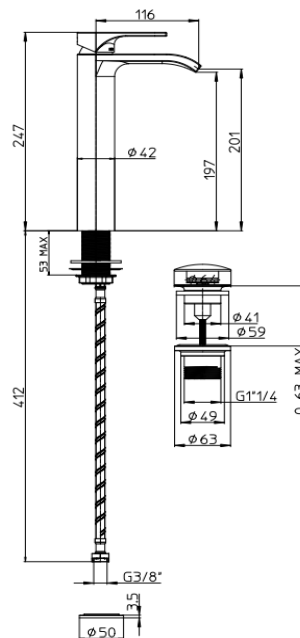Immagine Prodotto - Product Image**Disegni - Drawings****Grafico di portata - Flow rate diagram**

	out
0	0,0
0,5	3,6
1	5,1
1,5	6,2
2	7,2
2,5	8,0
3	8,8
3,5	9,5
4	10,3
4,5	10,8
5	11,4
pressione bar	portata L/min

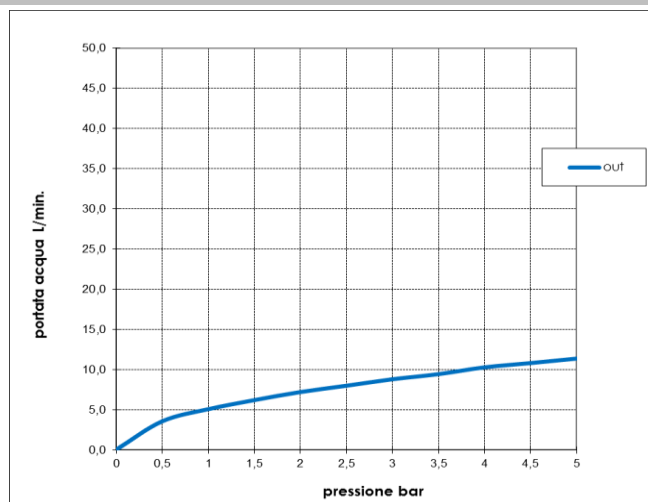

SCHEDA TECNICA - TECHNICAL SHEET			17/03/2025		Rev: 0	
Caratteristiche idrauliche - Hydraulic features						
	Pressione Pressure	Portata Flow rate	Solo per miscelatori termostatici Only for thermostatic mixers			
min	1 bar	5,1 L/min				
max	5 bar	11,4 L/min				
Portata minima consigliata per buon funzionamento Recommended minimum flow-rate for optimal performace		--				
			Blocco di sicurezza Safety lock		--	
			Temperatura acqua fredda Cold water temperature		--	
			Temperatura acqua calda Hot water temperature		--	
Materiali - Materials			Certificazioni - Certifications			
Miscelatore: Corpo in ottone Manopola: Zama Mixer : Brass body Handle : Zama alloy						
Conformità' - Conformity						
Mixer - EN817; Chrome plating - EN 248						
info@bossini.it www.bossini.it						