
MUTINA

Aria by Ronan Bouroullec



ΕN


General information Laying and maintenance tips Colors Technical features Packing

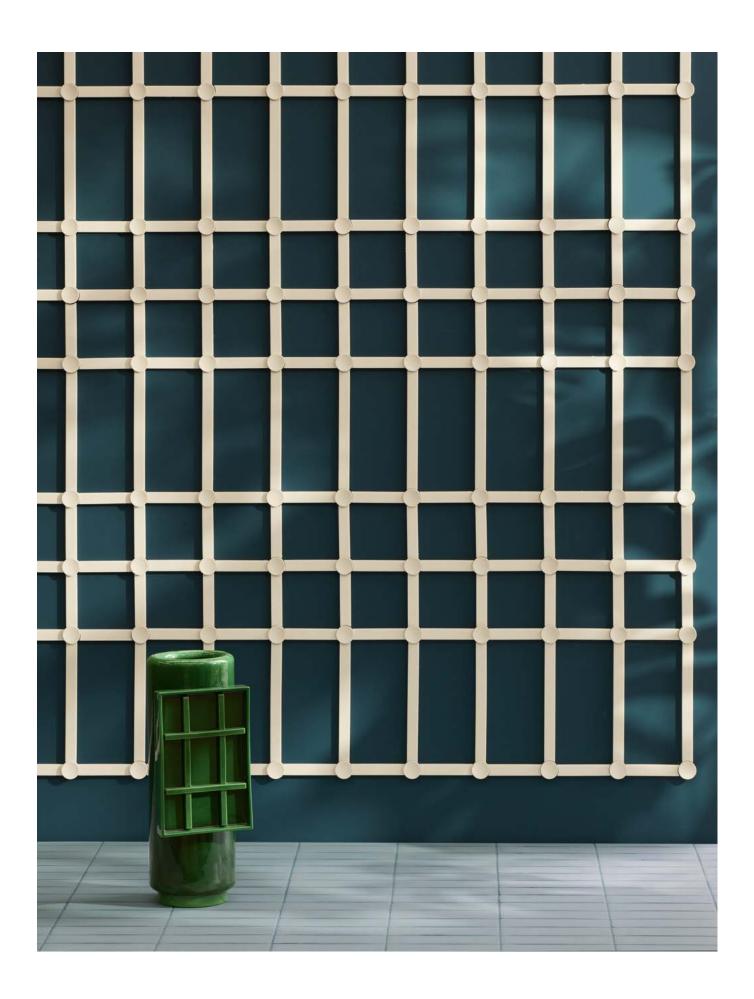

General information

collection	Aria					
design	Ronan Bouroullec, 2025					
production	Industrial					
material	Unglazed porcelain stoneware, with full body coloured mixture					
thickness	10 mm (Strip L, Strip S), 15 mm (Button)					
nominal sizes	Strip L 2,6·29·1 cm (1 ″·11,40″·0,39″) Strip S 2,6·12,8·1 cm (1 ″·5″ ·0,39″) Button Ø 4,2·1,5 cm (1,65″ ·0,59″)					
specification	5 colors: White, Chalk, Earth, Arctic, Olive					
category	UNI EN 14411:2016 App. L (Bla Group) UGL					

STRIP L

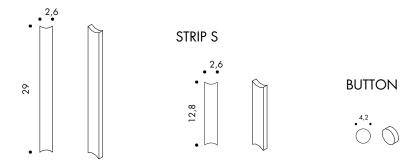

Laying and maintenance tips


use	Wall – indoor, outdoor.				
installation	Install on perfectly flat and dry walls. For correct installation, follow the installation instructions.				
recommended adhesive	Heat glue and silicone or other structural adhesive				
cleaning at the end of installation	SILICONE: Solvent for silicone e.g. FILA ZERO SIL. Put it straight onto the stain, wait for 20 minutes and remove the mark using scotch Brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacturer which solvent is most suitable. RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly.				
general cleaning (installed tiles)	We recommend the use of cleaners specifically designed for porcelain stoneware.				
calibers (real size)	288x26,5 mm - 128,5x26,5mm Ø 42mm				

laying suggestions

Strip L, Strip S and Button: three elements, endless possibilities.


To inspire and simplify the design process, Mutina has developed, in collaboration with the designer, four exclusive layout modules. Each module is designed to enhance textures and contrasts, and comes with an indicative cost per square meter.

For tailored advice and a detailed calculation of the required quantities, our sales team is at your disposal.

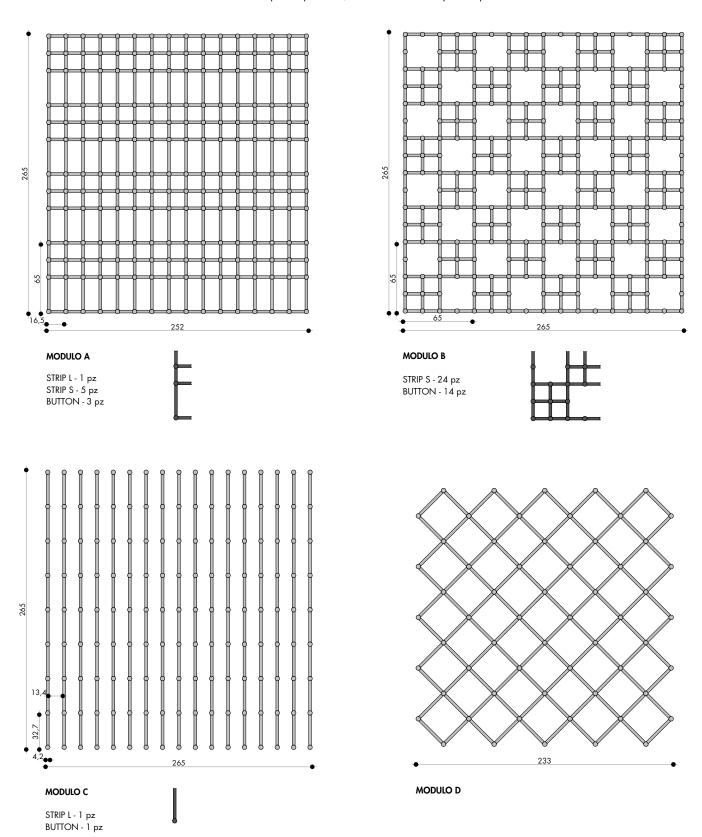

Colors

Strip L

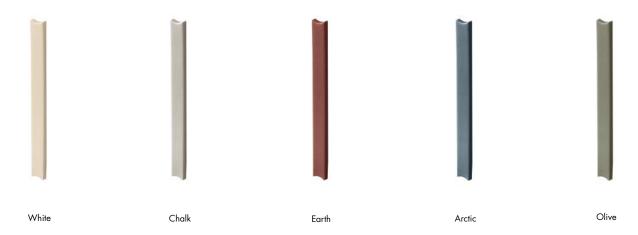

Strip S



Button



Technical features

STANDARD	FEATURES	VALUE REQUIRED	ARIA
ISO 10545/3	water absorption	< 0,5%	0,2%
ISO 10545/9	resistance to thermal shock	no visible alteration	resistant
ISO 10545/13	resistance to acids and alkalis (low and high concentration)	declared value	A
	(minimum class B	A
	resistance to household cleaning agents and swimming pool chemicals		
ISO 10545/14	stains resistance	minimum class 3	3
VOC Emission			available upon request
Declaration of Contents		available upon request	
SVHC DECLARATION			available upon request
HPD			available upon request

Packing

SIZE	PCS-SQM	PCS-BOX	BOX-PAL	KG-PAL
Strip L	see laying scheme	64	80	798,70
Strip S	see laying scheme	128	80	694,20
Button	see laying scheme	32	168	245,10